


Semi-Rigid Aluminium Ducting

**AO4014MR, AO5014MR, AO6014MR,
AO48MX/9, AO403M, AO403MR, AO503M,
AO503MR, AO603M, AO603MR & AO803M**

Supplied in a compressed length, this form of semi-rigid ducting expands and holds its shape and full diameter even when bends are applied.

Constructed from continuous spiral bound aluminium, the ducting is self supportive needing only minimal fittings or mechanics each end for additional support.

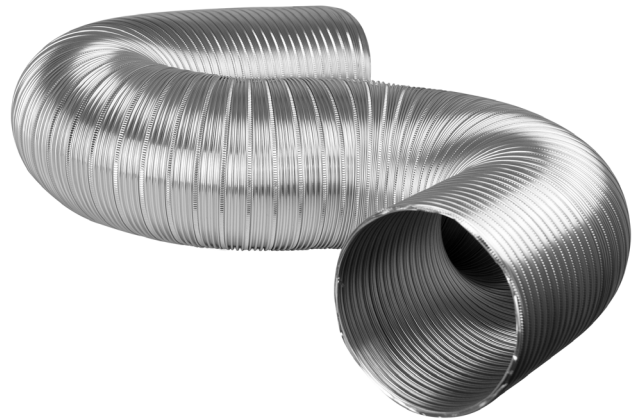

Key Benefits

- **Complies with Australian Standards - AS1668.1**
- **4 - Zero fire rating to Australian Standards - 1530.3**
- **Temperature rating -70 °C to +220 °C**
- **Manufactured material thickness 0.89mm**

Performance

- **Maximum Velocity: 5000FPM/25MPS**
- **Maximum Rated Pressures: 3" -8" dia., 6" W.C/1.5 Kpa Pos/Neg**
- **Operating Temperature Range: -70°C to 220°C Inter.**
- **Class 0 Air Duct, Flexible**
- **Flame Spread/Smoke Developed: 0/0**

1.4 Metre Length Duct

Model No.	Description	Diameter (mm)	Length (M)	Packaging
AO4014MR	Semi-Rigid Aluminium Duct (Bulk) (100mm)	100	1.4	Loose
AO5014MR	Semi-Rigid Aluminium Duct (Bulk) (125mm)	125	1.4	Loose
AO6014MR	Semi-Rigid Aluminium Duct (Bulk) (150mm)	150	1.4	Loose

3 Metre Length Duct

Model No.	Description	Diameter (mm)	Length (M)	Packaging
AO48MX/9	Semi-Rigid Duct with Clamps (MC4/2) (100mm)	100	3	Retail
AO403M	Semi-Rigid Aluminium Duct (Bulk) (100mm)	100	3	Loose
AO403MR	Semi-Rigid Aluminium Duct (100mm)	100	3	Retail
AO503M	Semi-Rigid Aluminium Duct (Bulk) (125mm)	125	3	Loose
AO503MR	Semi-Rigid Aluminium Duct (125mm)	125	3	Retail
AO603M	Semi-Rigid Aluminium Duct (Bulk) (150mm)	150	3	Loose
AO603MR	Semi-Rigid Aluminium Duct (150mm)	150	3	Retail
AO803M	Semi-Rigid Aluminium Duct (Bulk) (200mm)	200	3	Loose